



TU ALIADO EN LA CONFECCIÓN

Colombia, Bogotá D.C | Transv 77J #69-09



Jack

JACK

China No.1



Power Saving Feed-off-arm Machine



JK-T9270D/9280D



Jack Wechat



Jack Sewing
Machine Co.,Ltd.

JACK SEWING MACHINE CO.,LTD.

No. 15 Airport South Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com

JK-T9270D/9280D


Name: Power Saving Feed-of-arm Machine Integrated
Feature: Direct Drive, Power Saving

Advantages:



1 Direct Drive, High Efficiency

750W direct saver motor, compared with the clutch motor, more accurate to control mechanical structure. Also it is power saving and high efficiency machine.

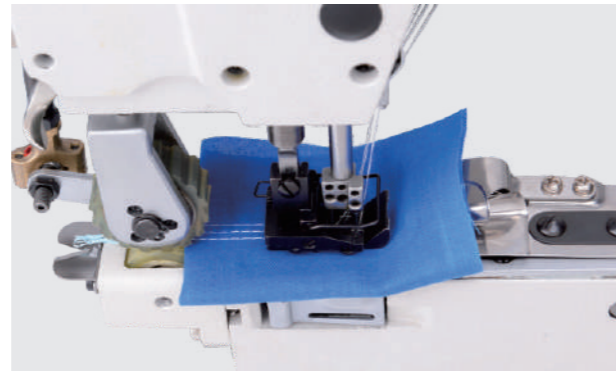


2 Cantilever Cylindrical Structure, Wide Range Of Application

Cylindrical design makes out more beautiful stitch and reduces the wrinkled of fabric. Widely used in Shirt, uniform, jeans, from light duty to heavy duty product.



3 Lubricated Rear Puller Device Design

Realization of the rear puller lubricated makes the rear puller lubricate continuously, which extends the life of rear puller a lot

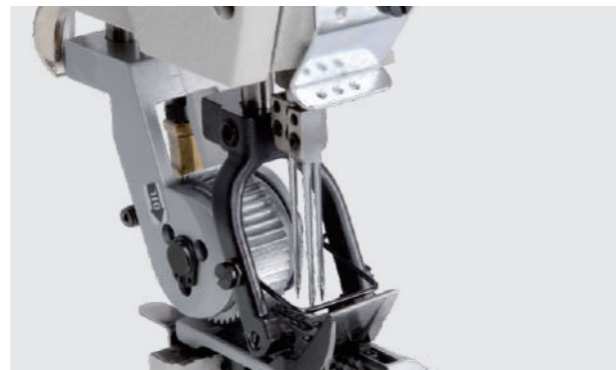

4 Automatic Needle Position Function

The needle position is always in upside. Convenient to sewing, needle exchanging and thread making.



5 Removable needle guard, beautiful stitch.

Removable need guard, to prevent the skipping stitch, to make the high quality with high efficiency.




6 Stich length adjust button. Widely used with different fabric.

The button can adjust the stitch length easily to satisfy many different requirements.



7 LED light

Easy to thread making, needle changing and relieve visual fatigue.

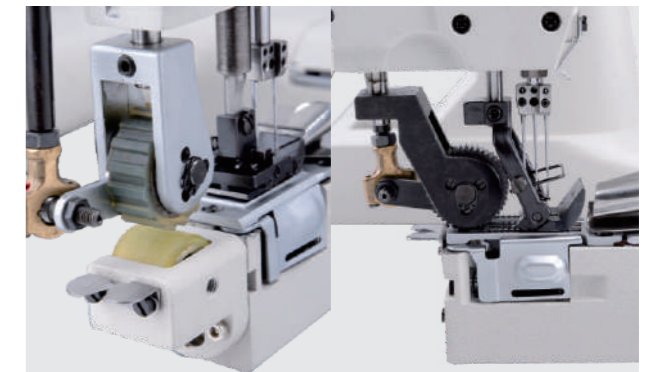

8 Different kinds of puller devise, feed the cloth more stable

PL puller device is built-in direct drive puller whose structure is very simple; PS puller is outside which makes the cloth feeding size wider and adjustment convenient.

JK-T9270D/9280D Stitch Showing



Technical Parameters

				(mm)	(mm)				(S.p.m)	(mm)	(kg)	
JK-T9270-12(1/4)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-12(3/16)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-12-2PL(1/4)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-12-2PL(3/16)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-12-2PS(1/4)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-12-2PS(3/16)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-13(1/8)	TV×64 12#	3	6	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-13-2PL(1/8)	TV×64 12#	3	6	3.5	8	✓			3500	580x535x475	40/55	
JK-T9270-22(1/4)	TV×64 14#	2	4	3.5	8		✓		3500	580x535x475	40/55	
JK-T9270-22(3/16)	TV×64 14#	2	4	3.5	8		✓		3500	580x535x475	40/55	
JK-T9280-53(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	40/59	
JK-T9280-73-2PL(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	40/59	
JK-T9280-73-PL(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	40/59	
JK-T9280-73-PS(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	56/60	
JK-T9270D-12-2PL(1/4)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	56/60	
JK-T9270D-12-2PL(3/16)	TV×64 12#	2	4	3.5	8	✓			3500	580x535x475	56/60	
JK-T9270D-13-2PL(1/8)	TV×64 12#	3	6	3.5	10			✓	3500	580x535x475	56/60	
JK-T9280D-73-2PL(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	56/60	
JK-T9280D-73-PL(1/8)	TV×5 21#	3	6	4.2	10			✓	3500	580x535x475	56/60	



TU ALIADO EN LA CONFECCIÓN

Colombia, Bogotá D.C | Transv 77J #69-09

 **320-202-2470/314-403-4310/302-666-6665**

 **Gavi Coser**

 **@Gavi Coser**

 **@Gavi Coser**



Jack